
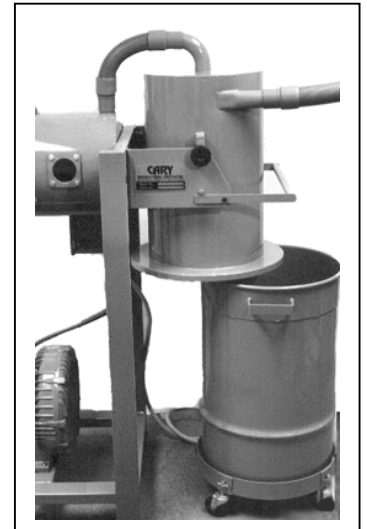
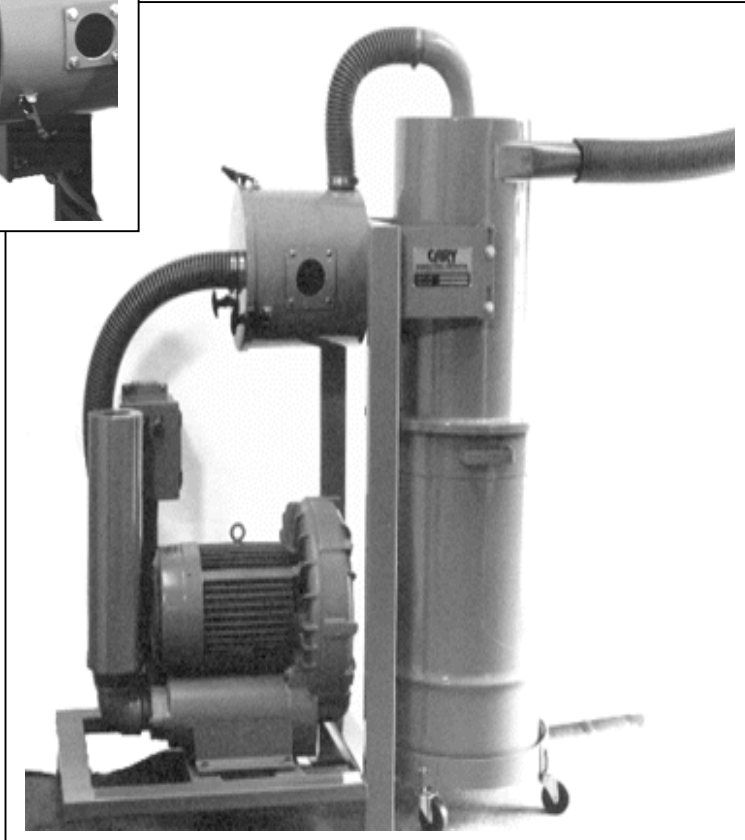


CARY CYCLO – SEPARATOR/ FILTER VACUUM SYSTEM

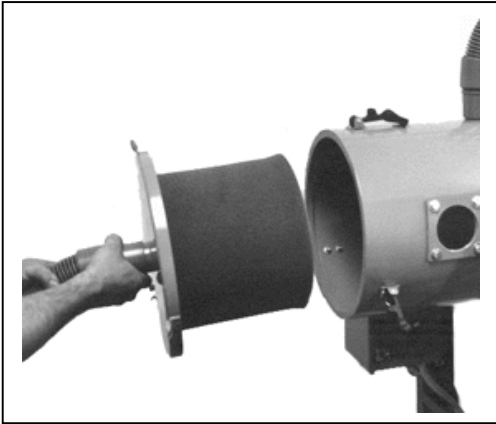

The Cary Cyclo-Separator/Filtered Vacuum System was designed for industrial and commercial applications requiring powerful and efficient clean up of dirt and/or heavy materials including water. The Cyclo/Separator removes most dirt, dust or other materials and drops them into a 30-gallon receiver that is mounted on a drum dolly for ease of dumping waste product.

Any carry over dust is filtered by a highly efficient pleated filter element. The standard filter element filtration is 99% @ 10 micron. At 4 micron, 1 micron and HEPA filters are available.

CYCLO- FILTER SEPARATOR SYSTEM APPLICATIONS

Model Number	CS/FV604	CS/FV804
Motor Horse Power	4.5 HP	10 HP
Sealed Water Lift	100 inches WG	110 inches WG
Rating at 1" Orifice	130 SCFM	325 SCFM
Rating at 2" Orifice	190 SCFM	370 SCFM
Vac Relief Valve	Yes	Yes
Mag. Motor Starter	Yes	Yes
Control Voltage 24 VDC	Yes	Yes
Cyclo-Filter Separator	Yes	Yes
Waste Capacity	30 Gal.	30 Gal.
Full Load Watts	2.6 KW	6.4 KW
Voltage	230/460/575V	230/460/575V
Phase	3	3
Frequency	60	60
Weight (lb.)	290	525
Dimensions (L x W x H)	56" x 24" x 66"	56" x 24" x 66"

