

## Inline Vacuum Filter



### **BENEFITS:**


- Large dirt holding capacity and easy field cleaning, especially when mounted horizontally or inverted
- Low pressure design

### **FEATURES:**

- Seamless drawn housings
- O-ring seal
- Corrosive resistant gray powder coat carbon steel
- Stainless steel torsion clips for durability

### **TECHNICAL SPECIFICATIONS:**

- Vacuum Rating: medium vacuum service\*
- Temp (continuous): min -15°F (-26°C) max 220°F (104°C)
- Filter change out differential: 15-20" H<sub>2</sub>O over initial ΔP
- Paper: 99%+ removal efficiency standard to 2 microns

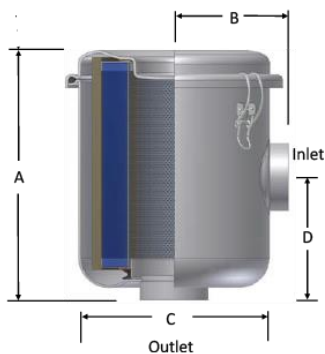

Model	Connection Size (in.)	Connection Type	Dim. A (in.)	Dim. B (in.)	Dim. C (in.)	Dim. D (in.)	Element Media	Micron Rating*	Replacement Element	Weight (lbs.)
IVF-123	1-1/4	(F)NPT	6-3/4	4-1/8	7-5/16	4-1/2	Paper	2	IVF-123E	5
IVF-45	1-1/2	(F)NPT	6-3/4	4-1/8	7-5/16	4-1/2	Paper	2	IVF-45E	5
IVF-67	2	(F)NPT	10-1/4	4-9/16	8-3/4	5	Paper	2	IVF-67E	15
IVF-89	3	MPT	27-1/4	9	14	18-1/2	Paper	2	IVF-89E	47

\* OTHER ELEMENTS AVAILABLE UPON REQUEST (HEPA; Polyester & others)